




**ACTIVE SUB 225-1**  
SWISS MADE BY RELEC SA 1400 YVERDON

[info@psiaudio.com](mailto:info@psiaudio.com)


[www.psiaudio.com](http://www.psiaudio.com)

# Technical data sheet











### STEREO SYSTEM



### 5.1 SYSTEM

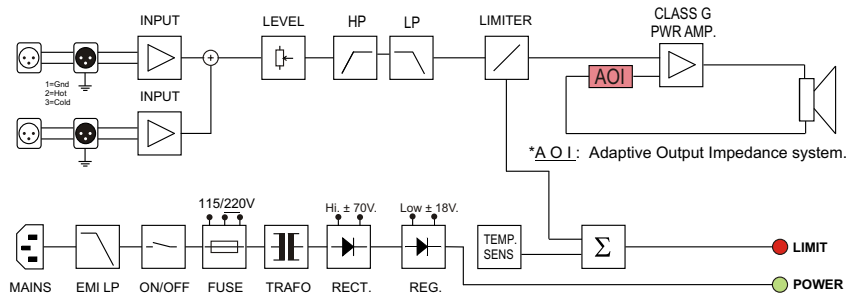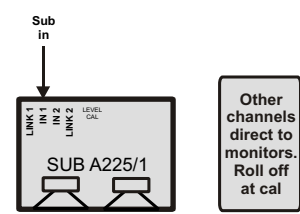


- Puissance RMS **150 W**
- Power RMS
- Puissance programme **200 W**
- Program power
- Impédance d'entrée **Sym, 10k Ohms**
- Input Impedance
- Sensibilité pour 100 dB @ 1m **0.775 V**
- Sensitivity for 100 dB @ 1m
- Rapport signal sur Bruit **-116 dBA**
- Signal to Noise Ratio
- Saturation d'entrée **24 Vpp**
- Input Overload
- Niveau max. continu, 1m **112 dB (single)**
- Continuous Max SPL, 1m
- Niveau max. programme, 1m **117dB / half space**
- Program Max SPL, 1m
- Réponse à -6 dB **28 - 120 Hz**
- Response at -6dB
- Tolérances **±2 dB (30Hz - 80Hz)**
- Tolerances
- Distorsions THD **< 1.6% (30Hz-180Hz)**
- Distortion THD
- Système **1 Way(s)**
- System
- Fréquence de coupure **90Hz**
- Crossover frequency
- Dim. basses Ext. / Membrane **Ø 250 mm / Ø 205 mm**
- Woofers dim. Ext. / Diaphragm
- Connecteurs **2 x XLR F / 2 x XLR M**
- Connectors
- Signal entrée **1=GND, 2=(+), 3=(-)**
- Signal input
- Matériaux du boîtier **MDF / double box**
- Box Material
- Dimensions boîtier L x H x P mm **320 x 700 x 500**
- Dimensions cabinet W x H x D mm
- Poids net **35 Kg**
- Net Weight
- Tension de secteur **115/230V (50-60Hz)**
- Voltage
- Consommation **18 - 200 VA**
- Power Consumption
- Humidité Moy / Max **< 75% / < 90%**
- Mean / Max Humidity
- Température externe **5 - 40 °C**
- External Temperature

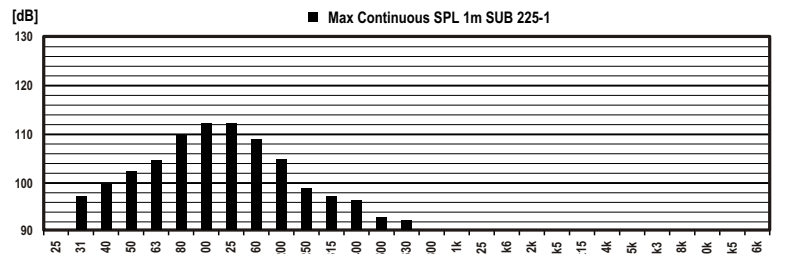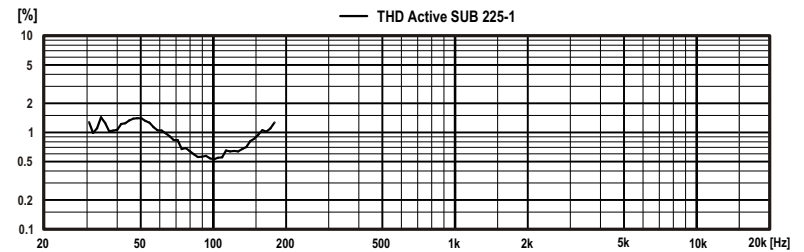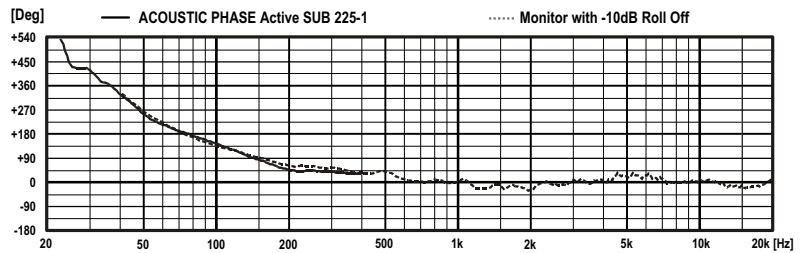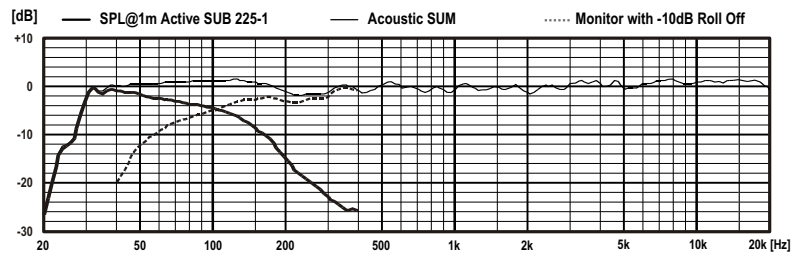


All dimensions are in mm

## Mounting

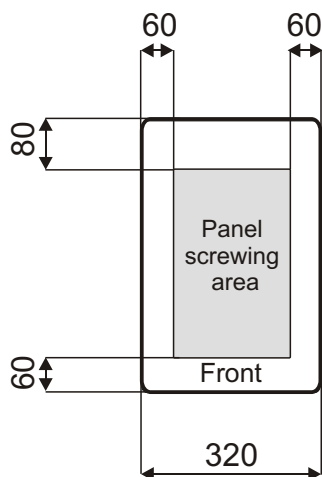


Bottom view

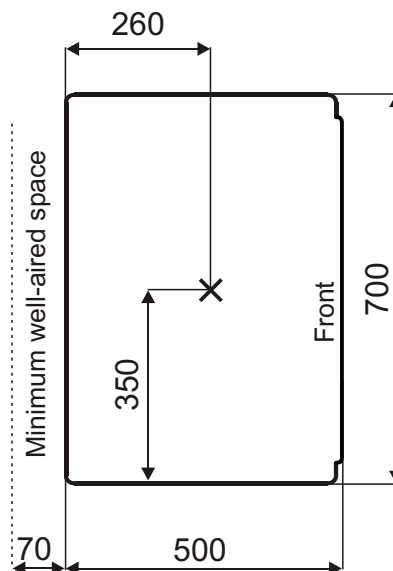

Side view

## Acoustical axis

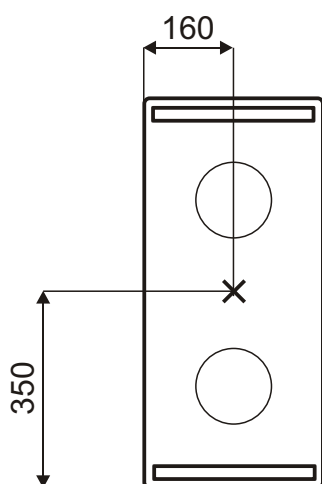

Front view

